



FOREDOM® Parts Price List Flexible Shafts, Sheaths & Couplings

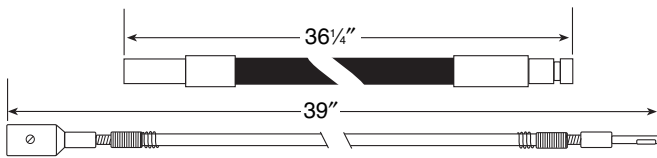


For all Series TX, LX, SR (1/6 and 1/8hp), Power Graver, L, S, CC, R, 900, 973, and 990,

36 1/4" Sheath No. 77 (for Shaft Nos. 93 & 93-NC)	\$13.00
36 1/4" Neoprene Sheath No. 77N (for Shaft No. 93)	14.00
36 1/4" Neoprene Sheath No. 76N for Power Graver	14.00
39" Shaft No. 93	9.00
39" Equine Shaft No. 93-NC	15.00
46 3/8" Shaft No. 93-43	10.40
43 5/8" Sheath No. 77-43 (for Shaft No. 93-43 46 1/2")	14.40
66" Shaft No. 93-66	14.00
66" Equine Shaft No. 93-NC-66	18.00
63 1/4" Sheath No. 77-66 (for 66" shafts)	16.00

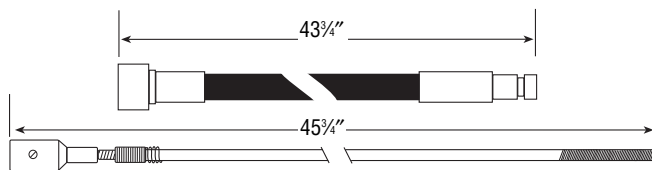


For Series H (Shaft and Sheath are Heavy Duty)

Sheath No. 10802A	\$40.00
Shaft No. S-10805	17.00
Silencer No. 10822	10.00
Complete Assembly No. 10804B	56.00

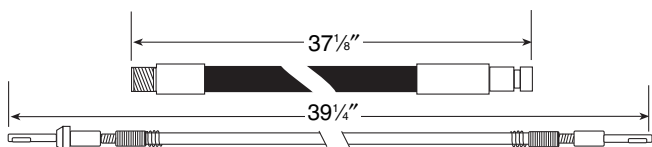

For all Series EE, GG, MMG, 975, 980W, 981W and 302 Vibrator*


Sheath No. 80	\$13.00
Shaft No. 96A	9.00
*Shaft No. 10075	9.00

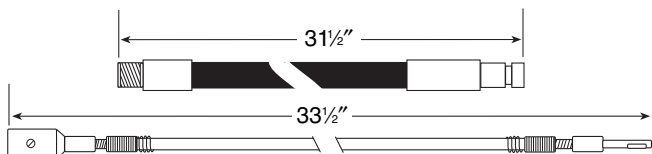

For all Series F, JJ, and JB


Sheath No. 82	\$13.00
Shaft No. 97	9.00

The Foredom Electric Company 16 Stony Hill Road, Bethel, CT 06801
Tel. 203-792-8622 • Fax 203-796-7861 • www.foredom.com

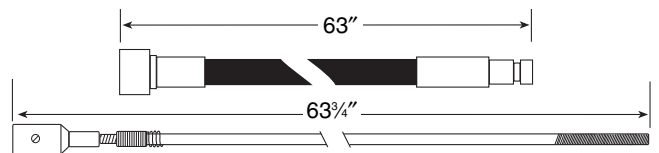

For Series TXH, LXH, and SRH (Shaft & Sheath are Heavy Duty)


Sheath No. 10801TX	\$42.00
Shaft No. S-10823	17.00
Silencer No. 10819	10.00
Complete Assembly No. 10816TX	58.00

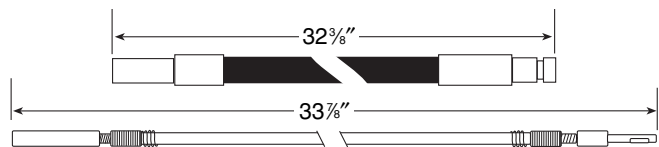

Note: Specify hole size: 1/4", 5/16", 3/8", or 1/2"


For All "B" Series Flexades®

Sheath No. 86	\$13.00
Shaft No. 104	9.00
Motor Coupling No. 92	8.00

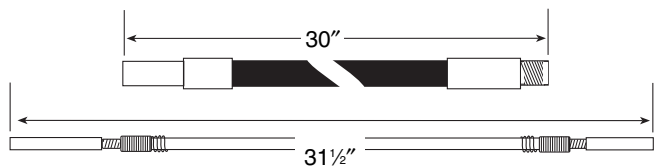

For "A" Series Flexades® Models: A-5, A-5D, A-8, A-8A, and A-8AD

Sheath No. 83	\$13.00
Swivel No. 91 (Not Shown)	2.50
Shaft No. 99	9.00

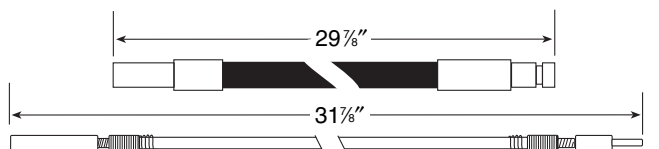

Note: Specify hole size: 1/4", 5/16", 3/8", or 1/2"

For "A" Series Flexades® Models: A-30, A-44, A-44A, and A-44B

Sheath No. 85	\$13.00
Shaft No. 102	9.00
Motor Coupling No. 10058	3.00

Prices are subject to change without notice.

Note: Foredom standard sheaths are of special composite construction including polyvinyl outer cover. Special neoprene sheaths are available on all models except the H Series, for use where extra flexibility is desired or protection from harmful chemicals is necessary. All flexible shafts are .150" (3.8mm) in diameter, except for the Series H which is .187". See back for performance data.